




PRÜFTECHNIK

[Download data sheet \(PDF\)](#)

Spring Probe DH-FKS-057.3

GRID: 0,70 mm / 28 mil

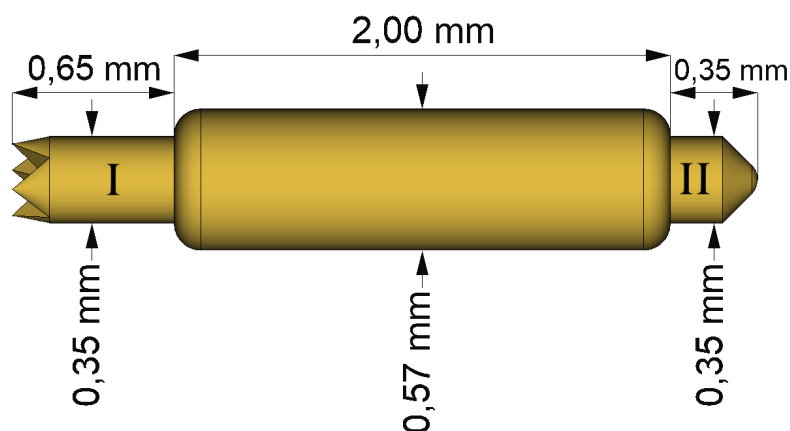

Technical Data

GRID:	0,70 mm / 28 mil
Working stroke:	0,50 mm
Maximum stroke:	0,60 mm
Contact resistance typical:	-
Current rating:	2,0 A
Spring force at working stroke:	0,45 N

Material

Plunger:	Full-Hard Beryllium Copper, gold plated
Barrel:	Phosphor bronze, gold plated
Spring:	Music wire, gold plated



PRÜFTECHNIK

Tip styles for DH-FKS-057.3

09	02	02	08	08
Plunger I	Plunger I, 60°	-	Plunger I	-
Plunger II	R: 0,08mm	Plunger II, 90°	-	Plunger II
\varnothing 0,35 mm	Plunger II, 60°	R: 0,08 mm	\varnothing 0,35 mm	\varnothing 0,25 mm
	0,35 mm	\varnothing 0,35 mm		

Further tip styles on demand.

subject to change