


[Download data sheet \(PDF\)](#)

Spring Probe DH-FKS-048

GRID: 0,60 mm / 24 mil

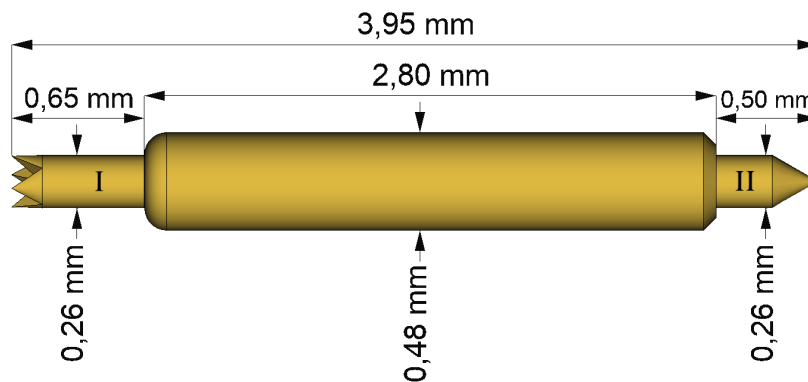

### Technical Data


<b>GRID:</b>	0,60 mm / 24 mil
<b>Working stroke:</b>	0,60 mm
<b>Maximum stroke:</b>	1,00 mm
<b>Contact resistance typical:</b>	-
<b>Current rating:</b>	1,0 A
<b>Spring force at working stroke:</b>	0,28 N

### Material

<b>Plunger:</b>	Full-Hard Beryllium Copper, gold plated
<b>Barrel:</b>	Phosphor bronze, gold plated
<b>Spring:</b>	Music wire, gold plated

---

Tip styles for DH-FKS-048

**Tip No.:**

02

08

**Specifications:**

-

Plunger I

Plunger II, 90°

-

**Tip diameter:**

ø 0,26

ø 0,26

Further tip styles on demand.

subject to change