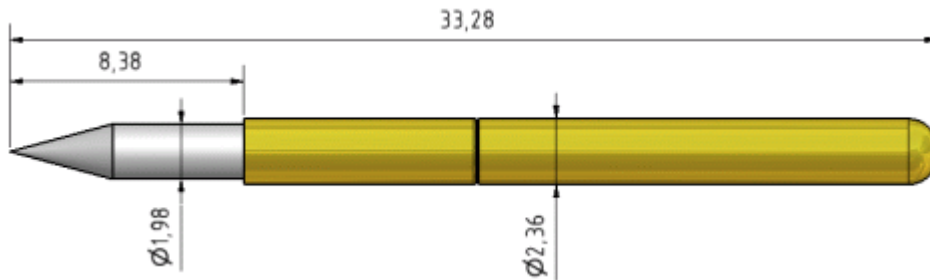

Spring Probe FKS-400

GRID: 3,96 mm / 156 mil



Technical Data







GRID:	3,96 mm / 156 mil
Working stroke:	4,32 mm
Maximum stroke:	6,35 mm
Contact resistance typical:	50 m Ω
Current rating:	5 A
Spring force at working stroke:	1,13 N 1,98 N 2,55 N 2,85 N







Material






Plunger:	BeCu, gold plated
Barrel:	Bronze, gold plated
Spring:	Music wire, gold plated



Tip styles for FKS-400

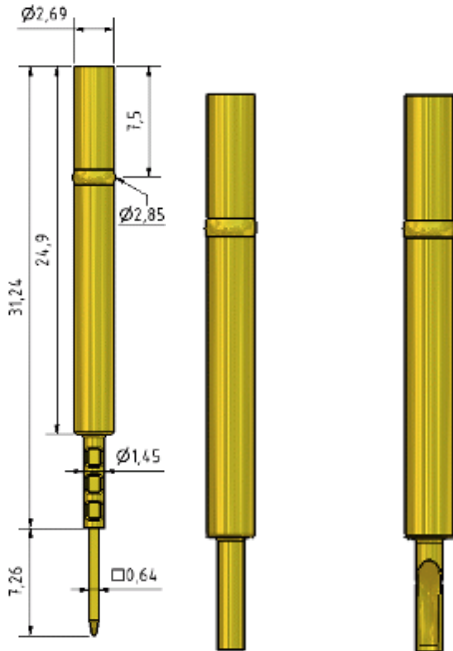
						
Tip No.:	01	02	03	04	05	06
Specifications:	-90°	30°			90°	
Tip diameter:	Ø 3,96	Ø 1,98	Ø 1,98	Ø 2,29	Ø 3,96	Ø 3,5 Ø 3,96

						
Tip No.:	07	08	08	09	12	12
Specifications:	-90°					
Tip diameter:	Ø 1,98	Ø 2,54 Ø 3,96	Ø 1,98	Ø 1,98	Ø 3,96	Ø 1,98

					
Tip No.:	14	17	17	18	24
Specifications:					dreiseitig
Tip diameter:	Ø 3,96	Ø 3,96	Ø 1,98	Ø 3,96	Ø 1,98 (30°)

Further tip styles on demand.

Receptacle for FKS-400



SH-400-P-W

SH-400-P-C

SH-400-P-L

Material: Bronze, gold plated

Mounting hole size: 2,75 mm (with receptacle)

subject to change