




[Download data sheet \(PDF\)](#)

Spring Probe FKS-602

GRID: 4,00 mm / 160 mil

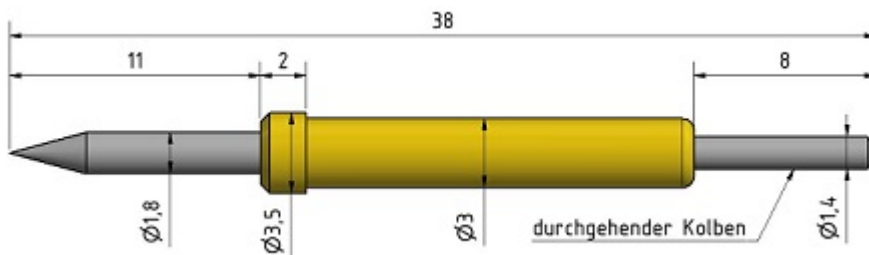

Technical Data

GRID:	4,00 mm / 160 mil
Working stroke:	5,6 mm
Maximum stroke:	7,0 mm
Contact resistance typical:	10 m Ω (am Kolben) 30 m Ω (an Hülse)
Current rating:	12-15 A (am Kolben) 5-8 A (an Hülse)
Spring force at working stroke:	1,5 N 3,0 N 5,0 N

Material

Plunger:	BeCu, gold plated
Barrel:	Brass, gold plated
Spring:	Music wire, gold plated

Tip styles for FKS-602



01

-90°

Ø 4,0



02

30°

Ø 1,8



08

Ø 1,8

Ø 3,0

Ø 4,0




12

Ø 4,0

Tip No.:**Specifications:****Tip diameter:**

Further tip styles on demand.

Receptacle for FKS-602

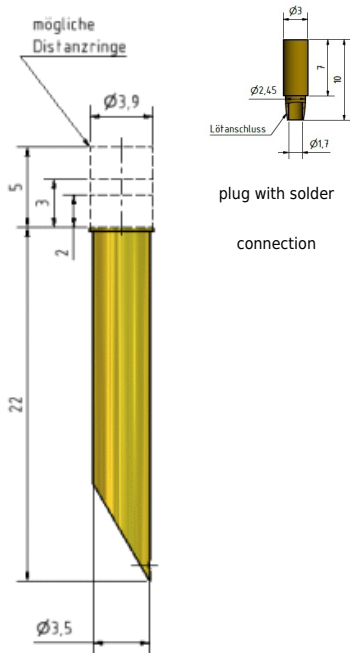

SH-602

Material: Brass, gold plated

Mounting hole size: 3,48 - 3,49 mm (with receptacle)
3,0 mm (without receptacle)

subject to change