




## Spring Probe FKS-714G

GRID: 8,0 mm - 315 mil

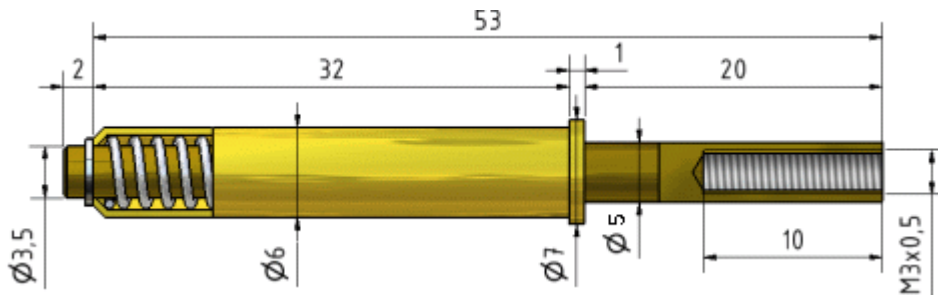

### Technical Data

<b>GRID:</b>	8,0 mm - 315 mil
<b>Working stroke:</b>	15,0 mm
<b>Maximum stroke:</b>	17,0 mm
<b>Contact resistance typical:</b>	24 m $\Omega$
<b>Current rating:</b>	3-5 A
<b>Spring force at working stroke:</b>	5,0 N


### Material

<b>Plunger:</b>	BeCu, nickel plated
<b>Barrel:</b>	Brass, nickel plated
<b>Spring:</b>	Music wire



FKS-714G is used to hold the board.

Tip styles for FKS-714G

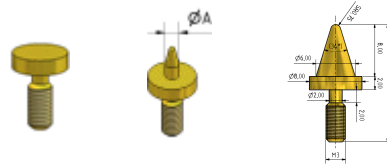

**Tip No.:**

**Specifications:**

**Tip diameter:**

2G	5"A"G	5UG
Material:	Material: brass	Material:
plastic	nickel plated	stainless steel
Ø 7,0		Ø 6,0

For "A" please

indicate the

diameter

requested!

Ø 2,0

Ø 2,5

Ø 3,0

Ø 3,2

Ø 3,5

Ø 4,0

Further tip styles on demand.

subject to change