


RP - 432 series

rigid probe for bare-board test systems

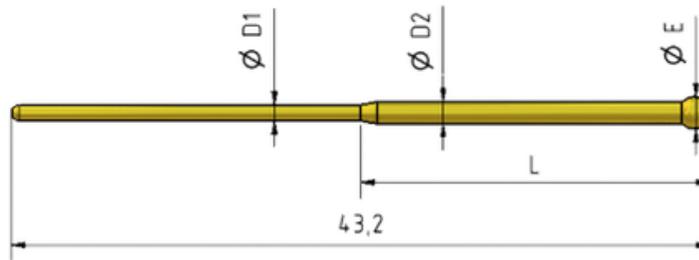

Technical Data

Specifications

Current rating:	3 A
Contact resistance typical:	50 mΩ
Material:	BeCu, hardened, rhodium or gold plated

All figures in mm

Variants

Best.Nr.:	Shaft ø D1:	Schaft ø D2:	Ball ø E:	Length L:	Tip style:
RP-432	0,6	0,8	1,4	10,8	02, 09, 14
RP-432	1,0	1,36	1,4	21,6	02, 09, 14
RP-432	0,8	1,35	2,0	21,6	02, 09, 14
RP-432	1,0	1,35	2,0	21,6	02, 09, 14

all figures in mm

Tip styles for Serie RP-432



Tip No.: 02 09 14

Further tip styles on demand.